

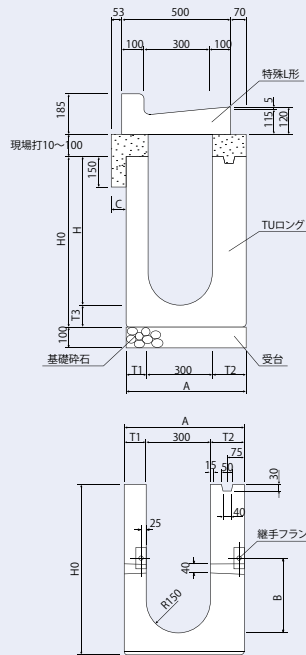


TUロング H=250~700




呼び名	寸法(mm)										質量(kg)
	H	Ho	A	B	C	D	T ₁	T ₂	T ₃	L	
TU-250	250	350	530	200	—	90	80	150	100	4000	1150
300	300	400	530	200	200	90	80	150	100	4000	1260
400	400	500	530	200	200	90	80	150	100	4000	1485
500	500	600	530	200	200	90	80	150	100	4000	1705
600	600	700	550	350	300	70	100	150	100	2000	1030
700	700	800	550	350	300	70	100	150	100	2000	1150

受台

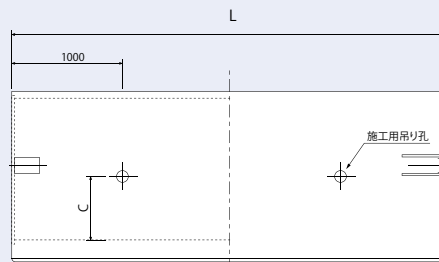


受台質量 28.5kg


TU型集水ます




呼び名	寸法(mm)				質量(kg)
	H	Ho	A	B	
250	250	550	200	375	320
300	300	600	200	375	345
400	400	700	200	375	390
500	500	800	200	375	430
600	600	900	350	525	475
700	700	1000	350	525	520

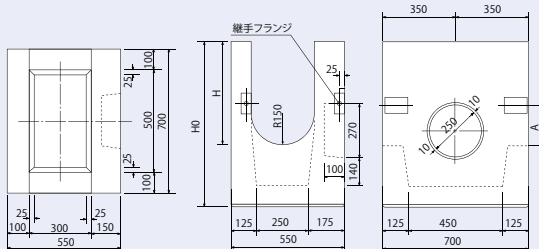

隅切り部

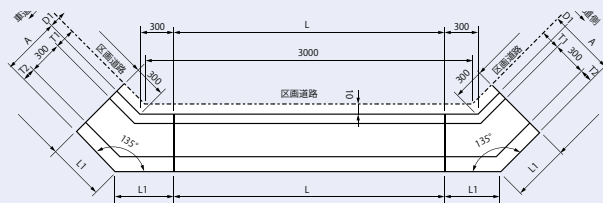



電柱切り廻し部

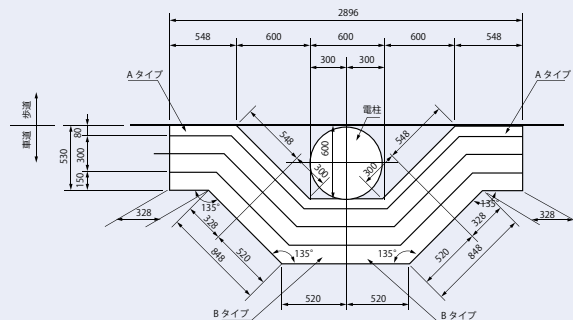


呼び名	寸法(mm)								
	L	L1	H	Ho	A	D ₁	T ₁	T ₂	T ₃
TU-250	2474	520	250	350	530	90	80	150	100
300	2474	520	300	400	530	90	80	150	100
400	2474	520	400	500	530	90	80	150	100
500	2474	520	500	600	530	90	80	150	100
600	2458	528	600	700	550	70	100	150	100
700	2474	520	700	800	530	90	80	150	100

バリアフリー対応 LGA側溝


バリアフリー対応

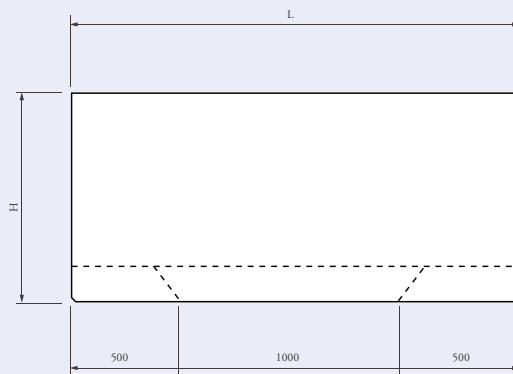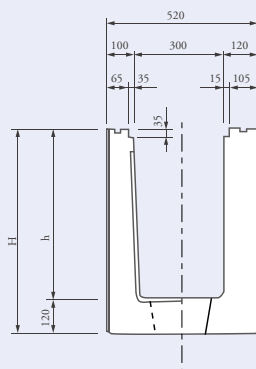

浸透側溝として使用




自由勾配側溝として使用



呼び名	寸法(mm)			質量(kg)
	h	H	L	
LGA 300	300	420	3000	934
LGA 400	400	520	3000	1099
LGA 500	500	620	3000	1265
LGA 600	600	720	3000	1430
LGA 700	700	820	3000	1596
LGA 800	800	920	3000	1762
LGA 900	900	1020	2000	1285
LGA 1000	1000	1120	2000	1395

集水ます (LGA側溝用)


※底部付きもご用意しております

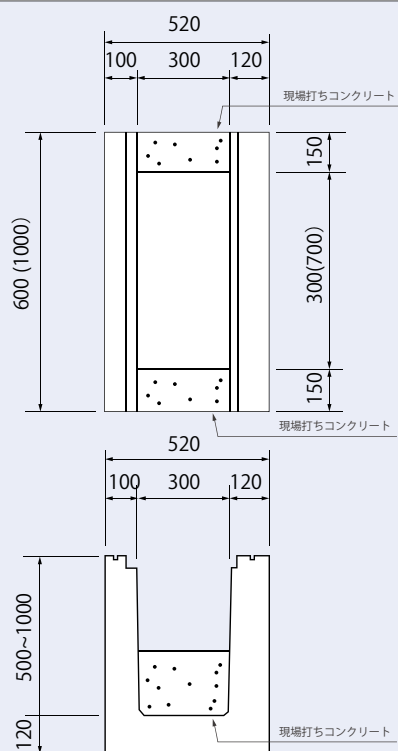


バリアフリー対応 LGA側溝

LG300


スタンダード




2点段差斜



2点段差平




LG300ガット




LG300縁塊 (L600)

スタンダード

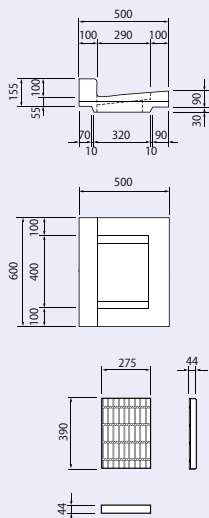


2点段差平




LG300縁塊 (L1000)

スタンダード


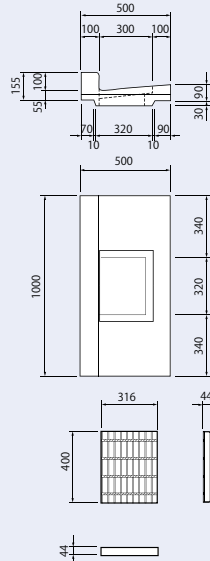


2点段差平

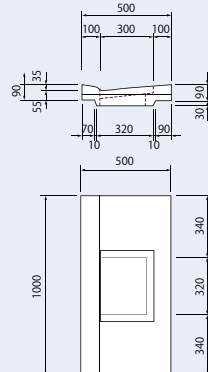


呼び名	質量 (kg)
LG300	
スタンダード	80
2点段差斜	76
2点段差平	71
LG300ガット	87
LG300縁塊L600	
スタンダード	56
2点段差平	47
LG300縁塊L1000	
スタンダード	110
2点段差平	97

LGAボックス暗きょ 300×240×2000(T-25)

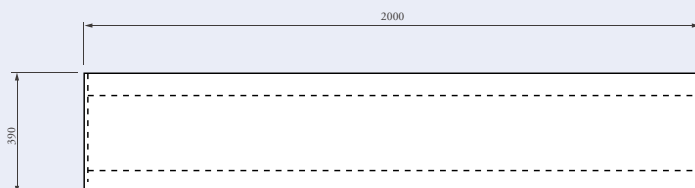


鉄筋コンクリート特殊L形(ふた掛け用)


一般部用

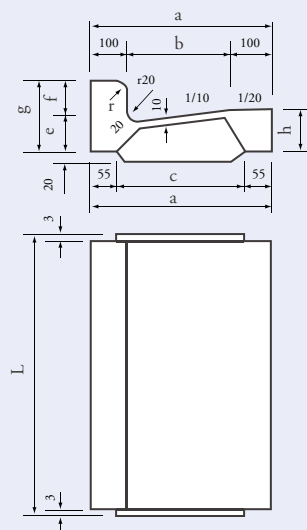


車乗り入れ用(切下)

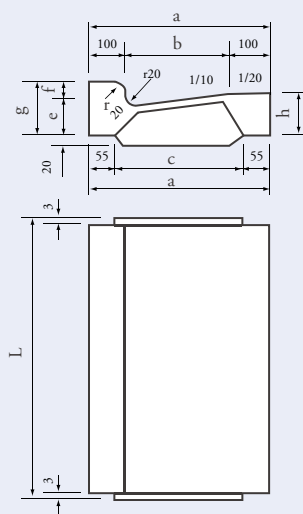

歩行者横断用(段差)

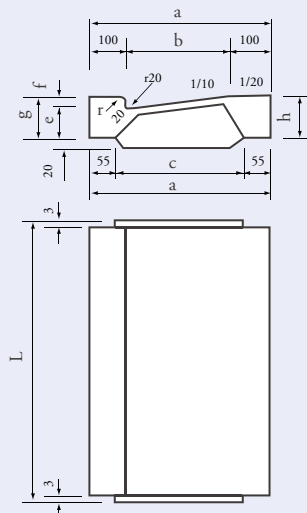

穴あき

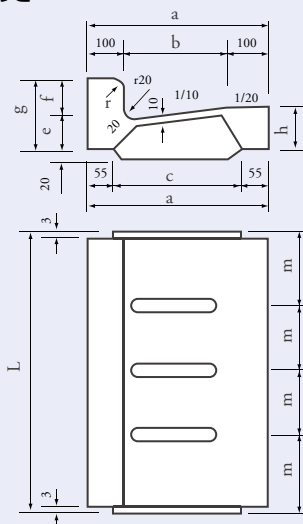

呼び名	寸 法 (mm)											質量 (kg)
	a	b	c	e	f	g	L	h	k	n	m	
240	340	140	230	55	100	155	600	74	—	—	—	50
240切下	340	140	230	55	50	105	600	74	—	—	—	43
240段差	340	140	230	55	20	75	600	74	—	—	—	39
240斜100/50	340	140	230	55	100/50	155/105	600	74	—	—	—	47
240斜100/20	340	140	230	55	100/20	155/75	600	74	—	—	—	45
300	400	200	290	55	100	155	600	80	—	—	—	57
300切下	400	200	290	55	50	105	600	80	—	—	—	50
300段差	400	200	290	55	20	75	600	80	—	—	—	46
300斜100/50	400	200	290	55	100/50	155/105	600	80	—	—	—	54
300斜100/20	400	200	290	55	100/20	155/75	600	80	—	—	—	52
240(穴あき)	340	140	230	55	100	155	600	74	30	140	150	48
240切下(穴あき)	340	140	230	55	50	105	600	74	30	140	150	41
300(穴あき)	400	200	290	55	100	155	600	80	30	200	150	55
300切下(穴あき)	400	200	290	55	50	105	600	80	30	200	150	48

鉄筋コンクリート特殊L形(ふた掛け用)縁塊

U形側溝

V形側溝


函渠側溝

L形側溝

L形側溝

境界ブロック



暗きよ

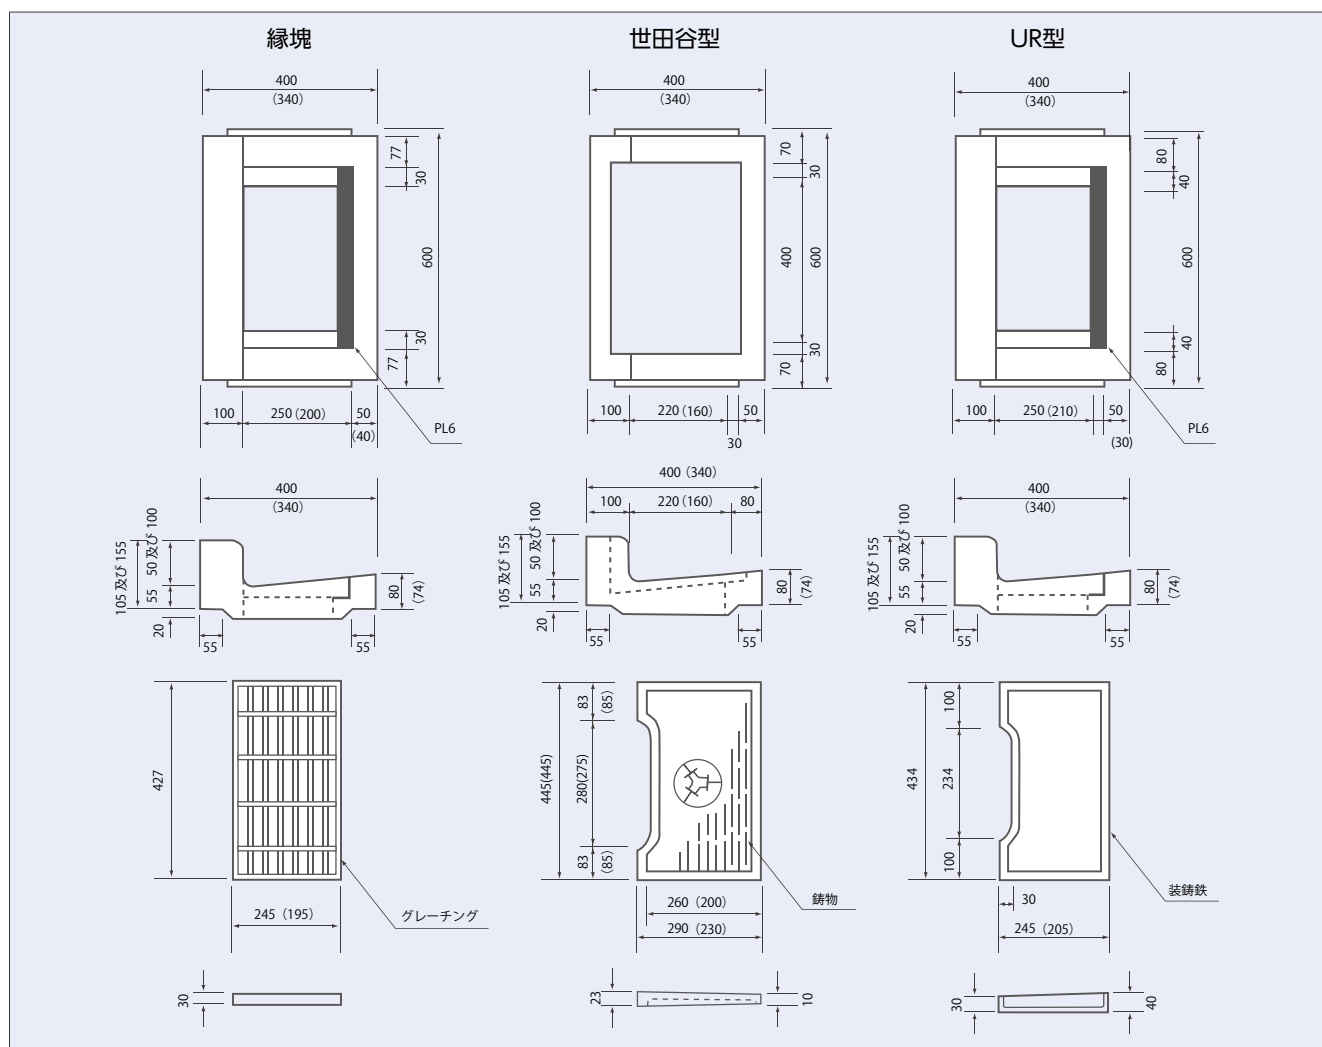

注. () 内は 240 用です。

呼び名	質 量 (kg)					
	縁 塊	縁 塊 E タイプ	世田谷型 縁 塊	世田谷型縁塊 E タイプ	UR型 縁 塊	UR型縁塊 E タイプ
240用	35	28	27	24	35	28
300用	39	33	31	27	39	33

横浜市型LU街渠及びます

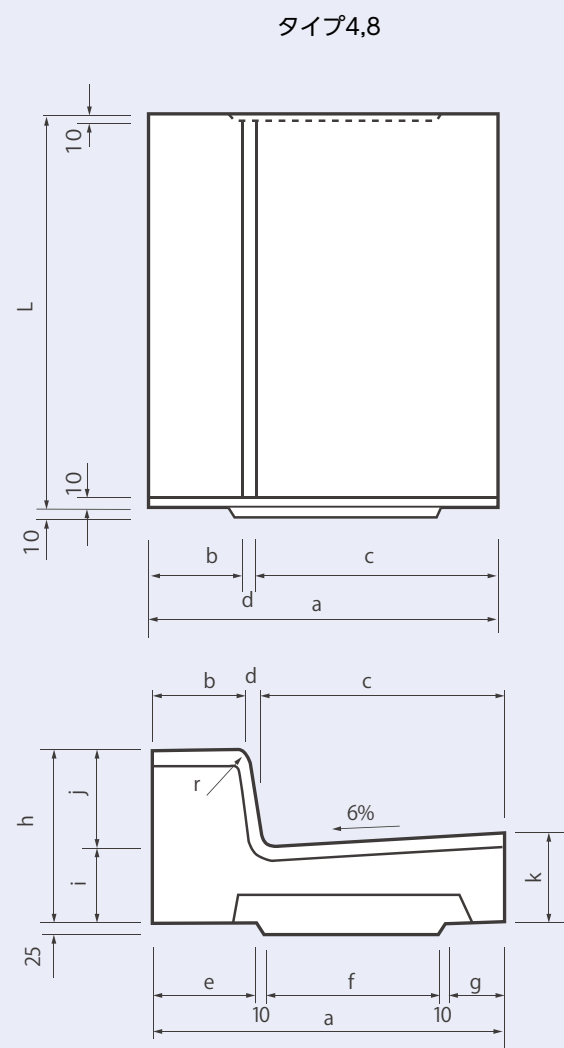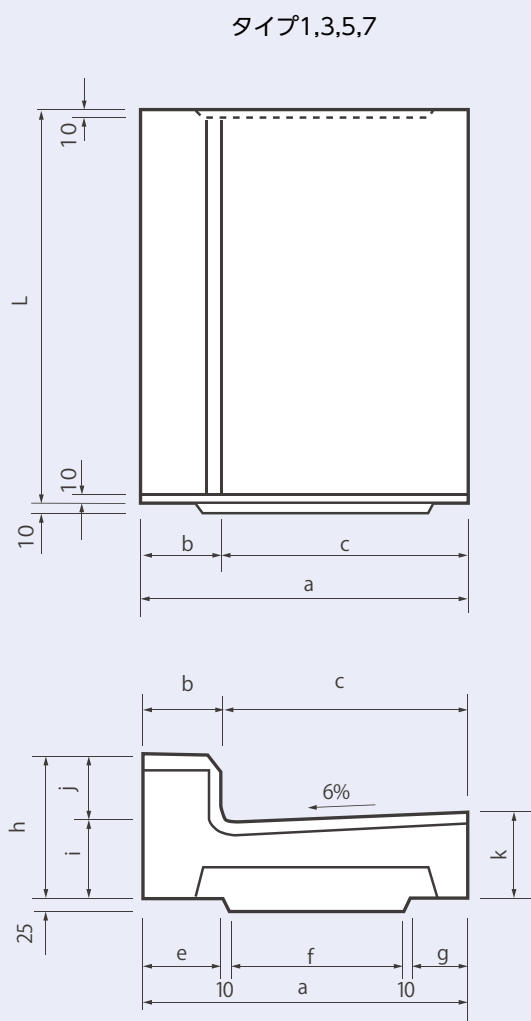


呼び名		寸法(mm)													質量(kg)
		a	b	c	d	e	f	g	h	i	j	k	r	L	
TYPE1・5	T-7	500	120	380	—	120	270	90	180	80	100	103	—	610	93
TYPE3・7	T-20	500	120	380	—	120	270	90	210	110	100	133	—	610	115
TYPE4・8	T-20	545	150	380	15	165	270	90	260	110	150	133	20	610	137


横浜市型LU街渠及びます

車両乗入れ部


タイプ1,3,5,7

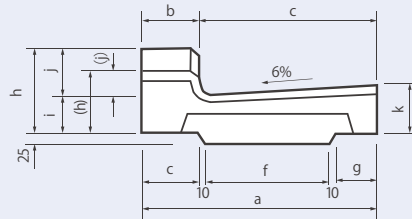


乗入れ部

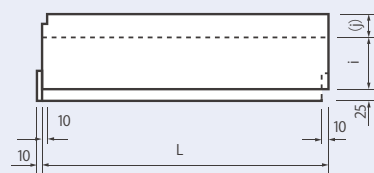

タイプ4,8

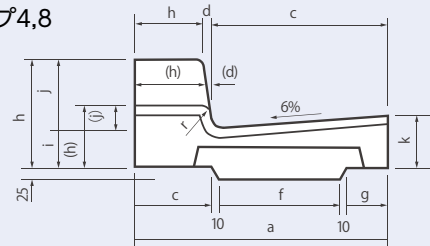


すり合わせ部

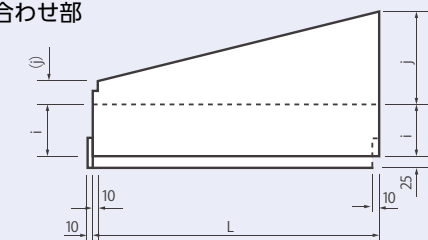


歩行者横断部


タイプ1,3,5,7

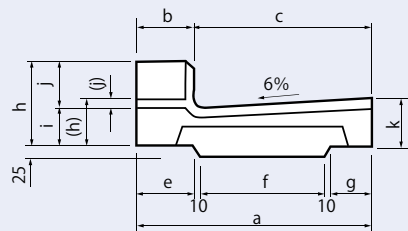


歩行者横断部

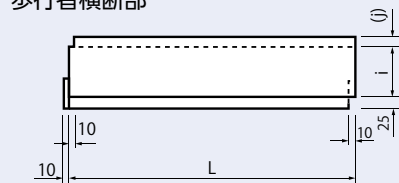

タイプ4,8

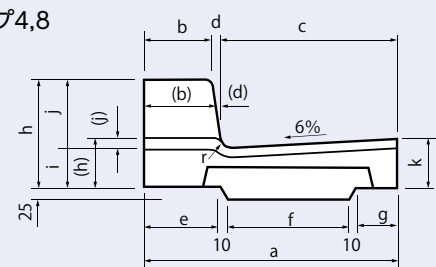

すり合わせ部

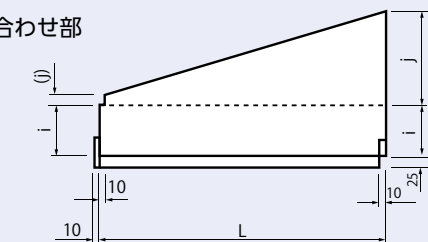

●車両乗入れ部

呼び名		寸法(mm)													質量(kg)	
		a	b(b)	c	d(d)	e	f	g	h(h)	i	j(j)	k	r	L	乗り入れ部	すり合わせ部
TYPE1・5	T-7	500	120	380	—	120	270	90	180(130)	80	100(50)	103	—	610	83	87
TYPE3・7	T-20	500	120	380	—	120	270	90	210(160)	110	100(50)	133	—	610	105	109
TYPE4・8	T-20	545	150(160)	380	15(5)	165	270	90	260(160)	110	150(50)	133	20	610	115	126

※()内は、車両乗入れ部の寸法を示す。


●歩行者横断部

呼び名		寸法(mm)													質量(kg)	
		a	b(b)	c	d(d)	e	f	g	h(h)	i	j(j)	k	r	L	歩行者横断部	すり合わせ部
TYPE1・5	T-7	500	120	380	—	120	270	90	180(100)	80	100(20)	103	—	610	77	84
TYPE3・7	T-20	500	120	380	—	120	270	90	210(130)	110	100(20)	133	—	610	99	106
TYPE4・8	T-20	545	150(163)	380	15(2)	165	270	90	260(130)	110	150(20)	133	20	610	108	123


※()内は、歩行者横断部の寸法を示す。 ※すり合わせ部タイプ-1・5、3・7は50～20有り

横浜市型LU街渠及びます

LU形街きょ及びます

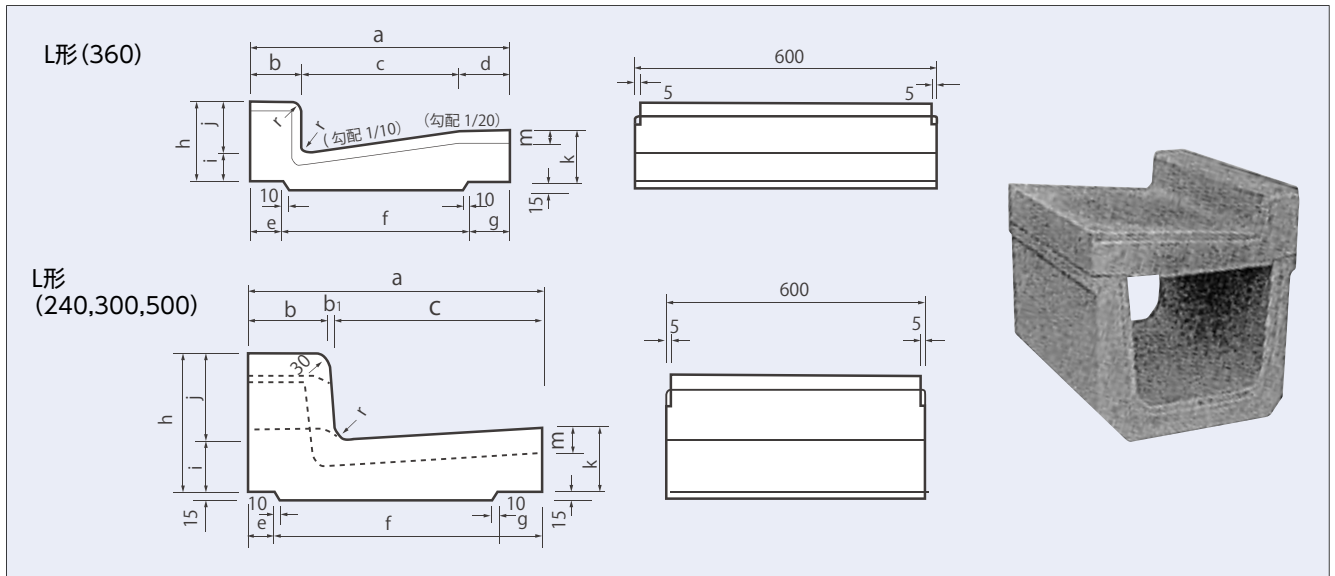

呼び名		寸 法(mm)														質量 (kg)
		a	b	b ₁	c	d	e	f	g	h	i	j	k	m	r	
T-14	240	350	100	—	250	—	50	230	70	155 105	55	100 50	80	30	20	51 44
	300	420	100	—	320	—	55	290	75	155 105	55	100 50	85	30	20	61 54
	360	500	100	—	300	100	65	350	85	155 105	55	100 50	90	30	20	77 70
T-20	240	350	100	—	250	—	50	230	70	195 145	95	100 50	120	0	20	71 64
	300	420	100	—	320	—	55	290	75	195 145	95	100 50	125	30	20	85 78
	360	500	100	—	300	100	65	350	85	200 150	100	100 50	135	30	20	116 109
	500	680	180 185 195	20 15 5	480	—	77	496	107	320 270 170	120	200 150 50	158	60	30	204 181 164

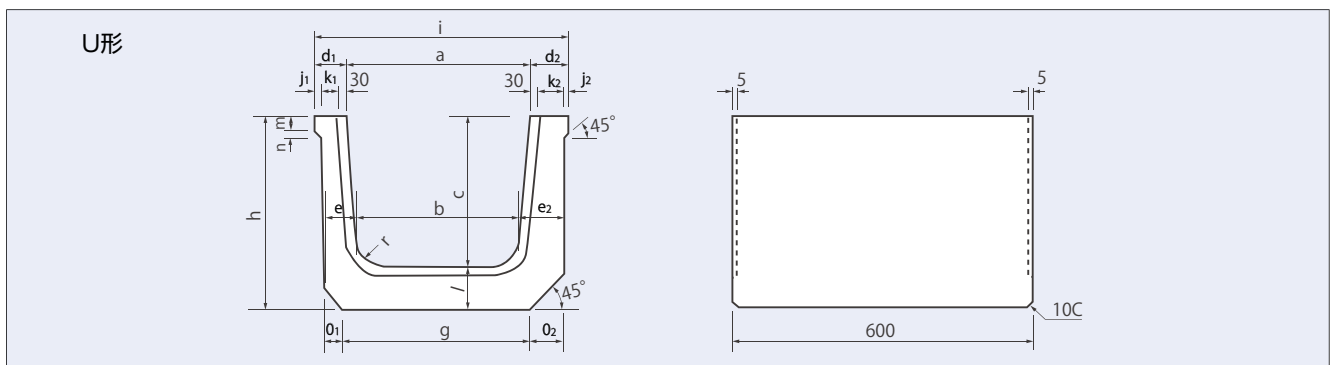


呼び名	寸 法(mm)																				質量 (kg)
	a	b	c	d ₁	d ₂	e ₁	e ₂	f	g	h	i	j ₁	j ₂	k ₁	k ₂	m	n	O ₁	O ₂	r	
240	240	220	240	45	65	55	65	60	260	300	350	—	10	15	25	30	10	40	40	50	67
300	300	260	300	50	70	70	80	70	330	370	420	—	10	20	30	30	10	40	40	50	96
360	360	310	300	60	80	75	95	80	360	380	500	10	10	20	40	30	10	40	80	50	116
500	500	420	400	75	105	95	125	90	540	490	680	20	20	25	55	35	20	50	50	50	192


横浜市型LU街渠及びます

LU型街きょ及びふた




L形縁塊 (240,300,360)

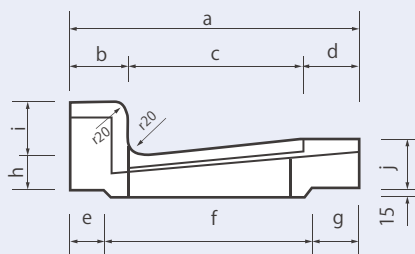

L形縁塊 (500)

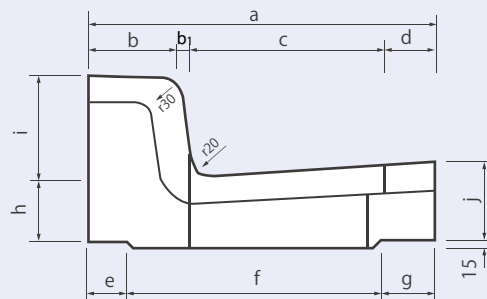

グレーチングふた

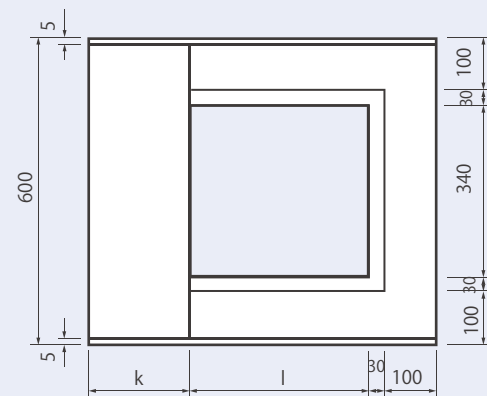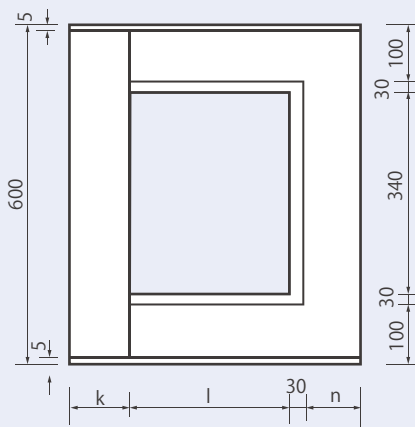

L形縁塊寸法表

呼び名		寸法(mm)														質量(kg)
		a	b	b ₁	c	d	e	f	g	h	i	j	k	l	n	
T-14	240	350	100	—	250	—	50	230	70	55	100	80	100	170	50	39
	300	420	100	—	320	—	55	290	75	55	100	85	100	230	60	43
	360	500	100	—	300	100	65	350	85	55	100	90	100	270	100	46
T-20	240	350	100	—	250	—	50	230	70	95	100	120	100	170	50	52
	300	420	100	—	320	—	55	290	75	95	100	125	100	230	60	59
	360	500	100	—	300	100	65	350	85	100	100	135	100	270	100	73
	500	680	180	20	480	—	80	490	110	120	200	150	200	350	100	170


グレーチングふた

呼び名		寸法(mm)			質量(kg)	呼び名		寸法(mm)			質量(kg)
		a	b	c				a	b	c	
T-14	240	190	390	32	4.1	T-20	240	190	390	50	6.5
	300	250	390	32	4.4		300	250	390	50	7.0
	360	290	390	32	5.8		360	290	390	50	9.2
	—	—	—	—	—		500	370	390	50	11.2



横浜市型LU街渠及びます

LU型街きょ集水ます用上・下側塊



500用集水ます

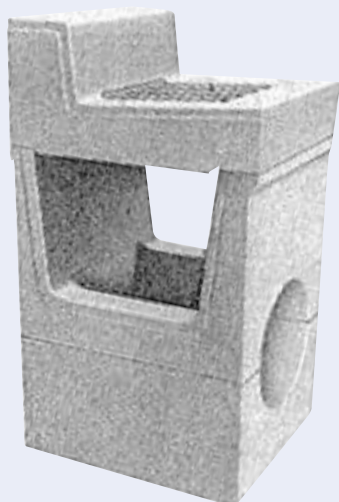

上部側塊

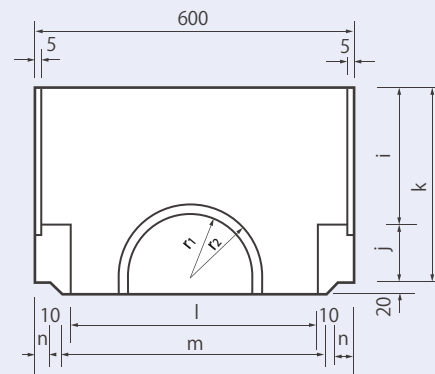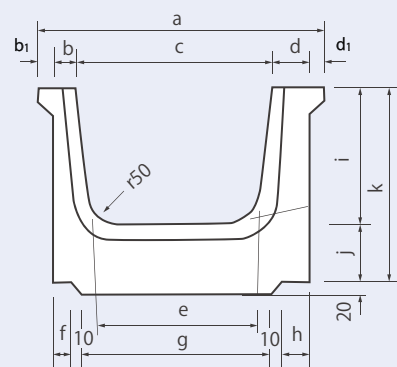

下部側塊

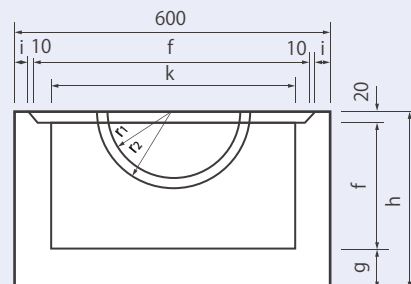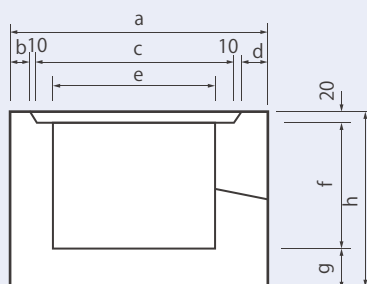

上部側塊


呼び名		寸 法(mm)																		質量 (kg)
		a	b	b ₁	c	d	d ₁	e	f	g	h	i	j	k	l	m	n	r ₁	r ₂	
T-14 T-20 兼用	240	350	45	—	240	55	10	220	35	245	40	240	60	300	460	510	35	100	125	54
	300	420	50	—	300	60	10	260	35	315	40	300	70	370	460	510	35	100	125	79
	360	480	50	—	360	70	—	310	40	360	60	300	110	410	460	510	35	130	150	105
	500	680	55	20	500	85	20	420	55	480	85	400	130	530	400	520	30	130	150	169

下部側塊

呼び名		寸 法(mm)													質量 (kg)
		a	b	c	d	e	f	g	h	i	j	k	r ₁	r ₂	
T-14 T-20 兼用	240	340	30	250	40	220	265	70	355	30	520	460	100	125	102
	300	410	30	320	40	260	265	70	355	30	520	460	100	125	126
	360	480	35	370	55	310	240	75	335	30	520	460	130	150	126
	500	640	50	490	80	420	250	90	360	35	510	400	130	150	203

横浜市型LU街渠及びます

LU型街きよ泥溜ます

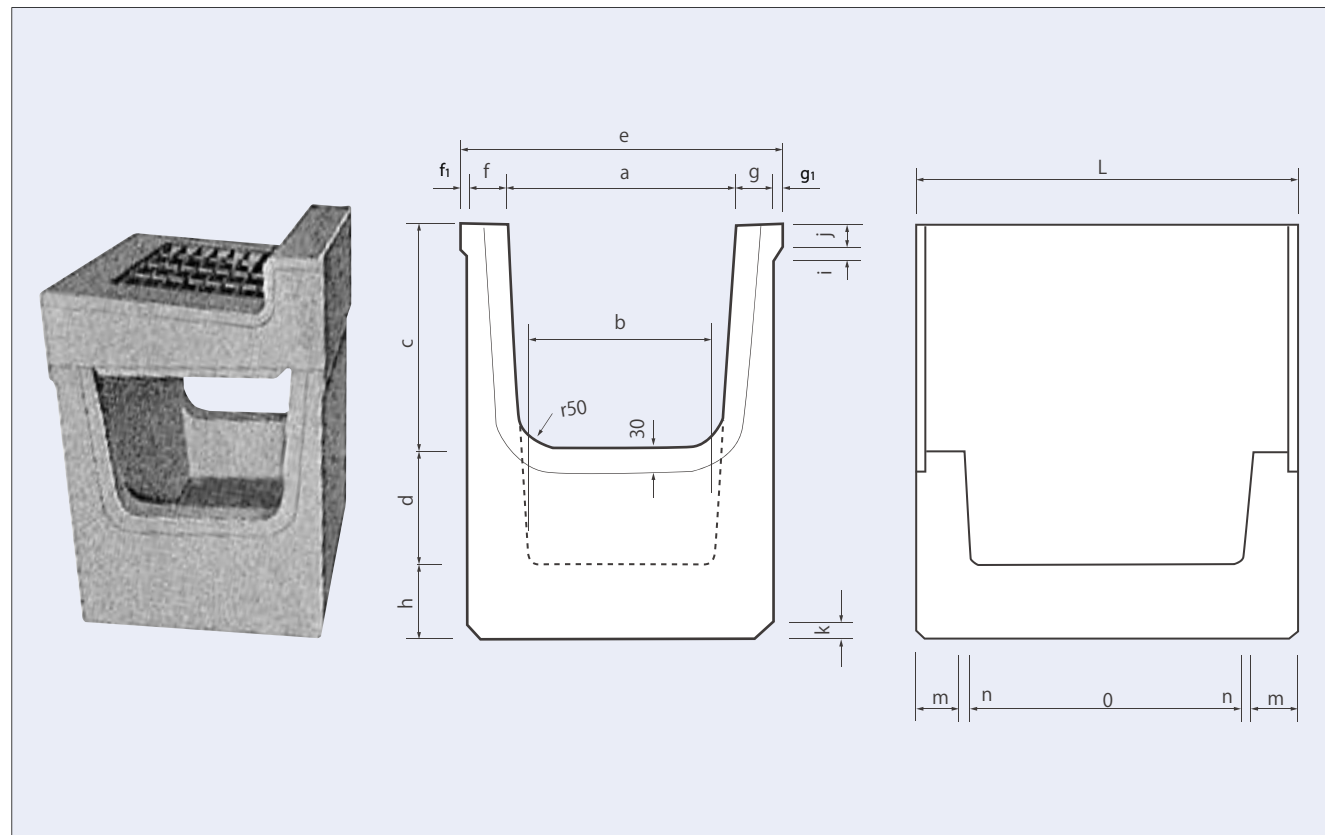

呼び名		寸 法(mm)																	質量 (kg)
		a	b	c	d	e	f	f ₁	g	g ₁	h	i	j	k	L	m	n	o	
T-14 T-20 兼用	240	240	208	240	150	350	45	—	55	10	100	10	30	20	600	70	6	448	126
	300	300	240	300	150	420	50	—	60	10	100	10	30	20	600	70	10	440	163
	360	360	285	300	150	500	50	10	70	10	100	10	30	20	600	70	12.5	435	188
	500	500	390	400	150	680	55	20	85	20	100	20	35	20	600	70	15	430	269